

Rotary Position Sensor

PHS11 Series



Features:

- Dust proof construction protects the interior from dust, which maintains stable characteristics
- Excellent resistance materials and high reliability wiper achieves 1,000,000 cycles
- Ultra-thin size (2.2mm height)

Description:

The PHS11 series is a rotary position sensor that features dust proof construction, an ultra thin size, and a life cycle of 1 million cycles. Some applications are HVAC sensors and motor drive units.

Applications:

- Rotary angle sensor
- Electric motor-driven bicycle
- Motor drive unit
- HAVC sensor

| Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | | | | | |
|---|---|-----|------------|---------|-----------------------|-----------------|
| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
| Ω | Resistance | 1K | | 100K | Ohms | |
| | Total resistance tolerance | | $\pm 20\%$ | | | |
| | Power rating | | | 0.1W | | |
| | Linearity (electrical angle $< 180^\circ$) | | ± 5 | | % | |
| | Linearity ($180^\circ \leq$ electrical angle $< 300^\circ$) | | ± 3 | | % | |
| | Linearity (electrical angle $\geq 300^\circ$) | | ± 2 | | % | |
| | Rotational noise | | | < 80 | mV | |
| | Effective Electrical Angle | | 333 | ± 3 | Degrees | |
| | TCR | | ± 500 | | ppm/ $^\circ\text{C}$ | |

General Note
TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
413 Rood RD, Suite 7
Calexico, CA 92231
Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies



Rotary Position Sensor

PHS11 Series



| Mechanical Characteristics | |
|----------------------------|---|
| Rotational Angle | 360° |
| Rotational torque | 0-30gf-cm |
| Shaft push/pull strength | > 1.0kgf for 10 sec min |
| Storage Temperature | -40°C to +120°C |
| Operating Temperature | -40°C to +120°C |
| Life Cycles | 1,000,000 cycles min |
| Dry Heat | 120 ± 3°C, 250 ± 8H ΔTR ± 20%, Linearity: ±2% |
| Cold | -40 ± 3°C, 168 ± 4H ΔTR ± 20%, Linearity: ±2% |
| Humidity | 60 ± 2°C, 90 to 95RH, 250 ± 8H ΔTR ± 20%, Linearity: ±2% |
| Temperature Cycles | -40°C to +120°C, 5 cycles ΔTR ± 20%, Linearity: ±2% |

Packaging

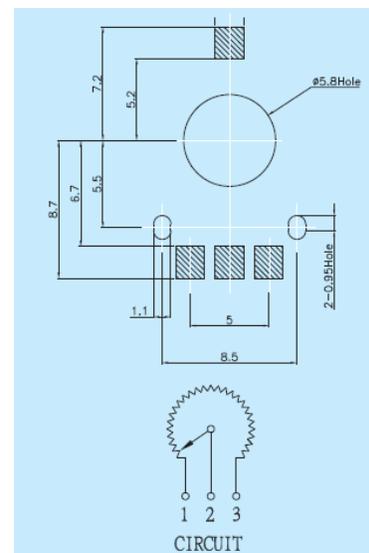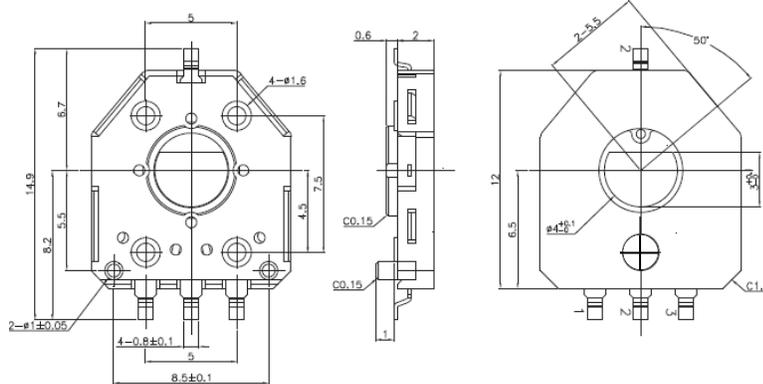

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

TT Electronics | BI Technologies
 413 Rood RD, Suite 7
 Calexico, CA 92231
 Ph: +1 714 447 2345
www.ttelectronics.com/bi-technologies

Ordering Information

