



ALPHA & OMEGA
SEMICONDUCTOR

AOT7S65L/AOB7S65L/AOTF7S65L/AOTF7S65
650V 7A α MOS™ Power Transistor

General Description

The AOT7S65L & AOB7S65L & AOTF7S65L & AOTF7S65 have been fabricated using the advanced α MOS™ high voltage process that is designed to deliver high levels of performance and robustness in switching applications. By providing low $R_{DS(on)}$, Q_g and E_{oss} along with guaranteed avalanche capability these parts can be adopted quickly into new and existing offline power supply designs.

Product Summary

$V_{DS} @ T_{j,max}$	750V
I_{DM}	30A
$R_{DS(ON),max}$	0.65Ω
$Q_{g,typ}$	9.2nC
$E_{oss} @ 400V$	2μJ

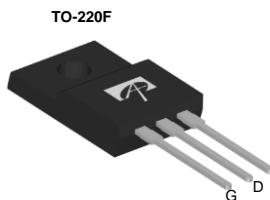
100% UIS Tested
100% R_g Tested




Top View




AOT7S65L



AOTF7S65(L)



AOB7S65L



Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	AOT7S65L/AOB7S65L	AOTF7S65	AOTF7S65L	Units
Drain-Source Voltage	V_{DS}	650			V
Gate-Source Voltage	V_{GS}		± 30		V
Continuous Drain Current	I_D	7	7*	7*	A
		5	5*	5*	
Pulsed Drain Current ^C	I_{DM}		30		
Avalanche Current ^C	I_{AR}		1.7		A
Repetitive avalanche energy ^C	E_{AR}		43		mJ
Single pulsed avalanche energy ^G	E_{AS}		86		mJ
Power Dissipation ^B	P_D	104	35	27	W
		0.8	0.3	0.2	W/°C
MOSFET dv/dt ruggedness	dv/dt		100		V/ns
Peak diode recovery dv/dt ^H			20		
Junction and Storage Temperature Range	T_J, T_{STG}		-55 to 150		°C
Maximum lead temperature for soldering purpose, 1/8" from case for 5 seconds ^J	T_L		300		°C
Thermal Characteristics					
Parameter	Symbol	AOT7S65L/AOB7S65L	AOTF7S65	AOTF7S65L	Units
Maximum Junction-to-Ambient ^{A,D}	R_{thJA}	65	65	65	°C/W
Maximum Case-to-sink ^A	R_{thCS}	0.5	--	--	°C/W
Maximum Junction-to-Case	R_{thJC}	1.2	3.6	4.7	°C/W

* Drain current limited by maximum junction temperature.

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=25^\circ\text{C}$	650	-	-	V
		$I_D=250\mu\text{A}, V_{GS}=0\text{V}, T_J=150^\circ\text{C}$	700	750	-	
$I_{\text{DS}}^{\text{SS}}$	Zero Gate Voltage Drain Current	$V_{DS}=650\text{V}, V_{GS}=0\text{V}$	-	-	1	μA
		$V_{DS}=520\text{V}, T_J=150^\circ\text{C}$	-	10	-	
I_{GSS}	Gate-Body leakage current	$V_{DS}=0\text{V}, V_{GS}=\pm30\text{V}$	-	-	±100	nA
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{DS}=5\text{V}, I_D=250\mu\text{A}$	2.6	3.3	4	V
$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}, I_D=3.5\text{A}, T_J=25^\circ\text{C}$	-	0.54	0.65	Ω
		$V_{GS}=10\text{V}, I_D=3.5\text{A}, T_J=150^\circ\text{C}$	-	1.48	1.64	Ω
V_{SD}	Diode Forward Voltage	$I_S=3.5\text{A}, V_{GS}=0\text{V}, T_J=25^\circ\text{C}$	-	0.82	1.2	V
I_S	Maximum Body-Diode Continuous Current		-	-	7	A
I_{SM}	Maximum Body-Diode Pulsed Current ^C		-	-	30	A
DYNAMIC PARAMETERS						
C_{iss}	Input Capacitance	$V_{GS}=0\text{V}, V_{DS}=100\text{V}, f=1\text{MHz}$	-	434	-	pF
C_{oss}	Output Capacitance		-	30	-	pF
$C_{o(er)}$	Effective output capacitance, energy related ^H	$V_{GS}=0\text{V}, V_{DS}=0 \text{ to } 480\text{V}, f=1\text{MHz}$	-	23	-	pF
$C_{o(tr)}$	Effective output capacitance, time related ^I		-	80	-	pF
C_{rss}	Reverse Transfer Capacitance	$V_{GS}=0\text{V}, V_{DS}=100\text{V}, f=1\text{MHz}$	-	1	-	pF
R_g	Gate resistance	$V_{GS}=0\text{V}, V_{DS}=0\text{V}, f=1\text{MHz}$	-	17.5	-	Ω
SWITCHING PARAMETERS						
Q_g	Total Gate Charge	$V_{GS}=10\text{V}, V_{DS}=480\text{V}, I_D=3.5\text{A}$	-	9.2	-	nC
Q_{gs}	Gate Source Charge		-	2.5	-	nC
Q_{gd}	Gate Drain Charge		-	2.7	-	nC
$t_{D(on)}$	Turn-On Delay Time	$V_{GS}=10\text{V}, V_{DS}=400\text{V}, I_D=3.5\text{A}, R_G=25\Omega$	-	21	-	ns
t_r	Turn-On Rise Time		-	14	-	ns
$t_{D(off)}$	Turn-Off Delay Time		-	55	-	ns
t_f	Turn-Off Fall Time		-	15	-	ns
t_{rr}	Body Diode Reverse Recovery Time	$I_F=3.5\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=400\text{V}$	-	224	-	ns
I_{rm}	Peak Reverse Recovery Current	$I_F=3.5\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=400\text{V}$	-	19	-	A
Q_{rr}	Body Diode Reverse Recovery Charge	$I_F=3.5\text{A}, dI/dt=100\text{A}/\mu\text{s}, V_{DS}=400\text{V}$	-	2.8	-	μC

A. The value of R_{0JA} is measured with the device in a still air environment with $T_A=25^\circ\text{C}$.

B. The power dissipation P_D is based on $T_{J(\text{MAX})}=150^\circ\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.

C. Repetitive rating, pulse width limited by junction temperature $T_{J(\text{MAX})}=150^\circ\text{C}$. Ratings are based on low frequency and duty cycles to keep initial $T_J=25^\circ\text{C}$.

D. The R_{0JA} is the sum of the thermal impedance from junction to case R_{0JC} and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using $<300\mu\text{s}$ pulses, duty cycle 0.5% max.

F. These curves are based on the junction-to-case thermal impedance which is measured with the device mounted to a large heatsink, assuming a maximum junction temperature of $T_{J(\text{MAX})}=150^\circ\text{C}$. The SOA curve provides a single pulse rating.

G. $L=60\text{mH}, I_{AS}=1.7\text{A}, V_{DD}=150\text{V}$, Starting $T_J=25^\circ\text{C}$

H. $C_{o(er)}$ is a fixed capacitance that gives the same stored energy as C_{oss} while V_{DS} is rising from 0 to 80% $V_{(BR)DSS}$.

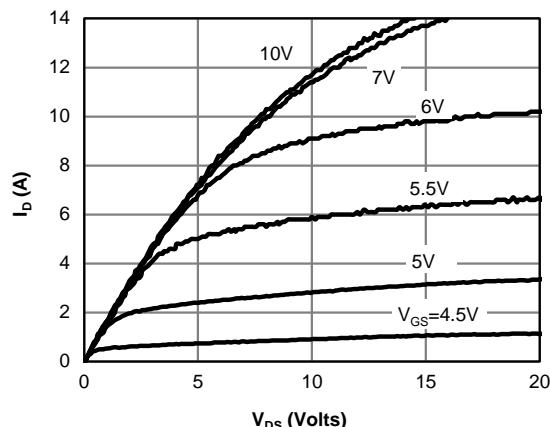
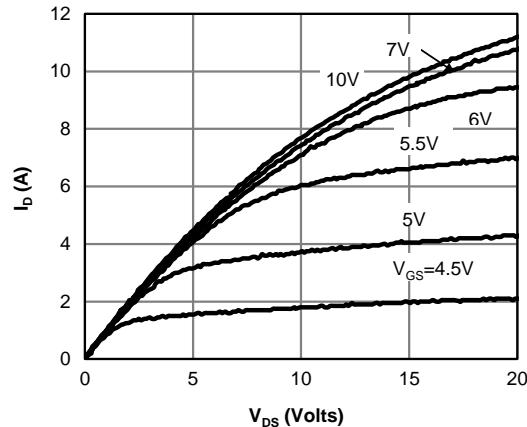
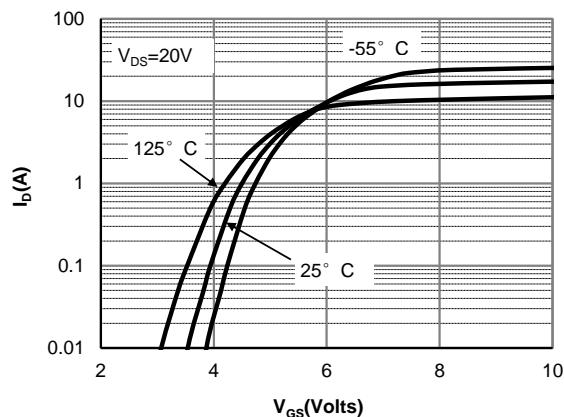
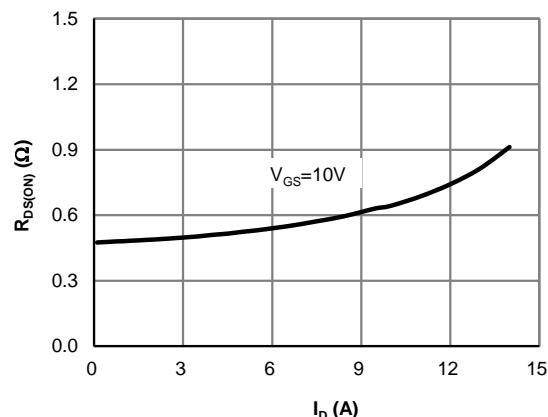
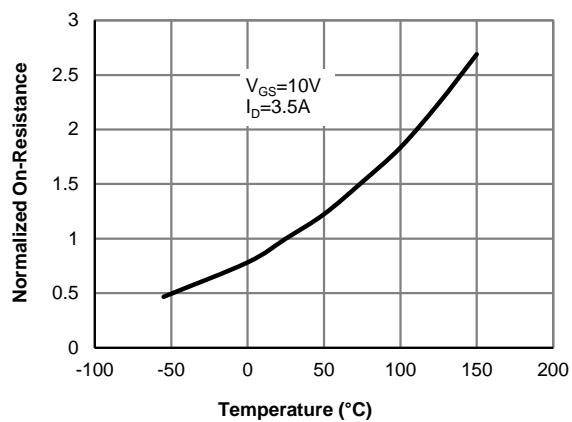
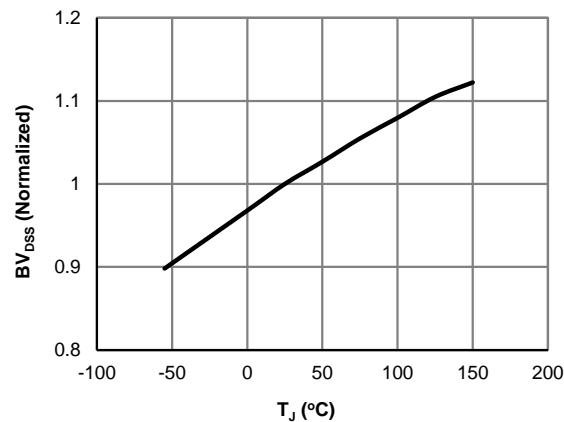
I. $C_{o(tr)}$ is a fixed capacitance that gives the same charging time as C_{oss} while V_{DS} is rising from 0 to 80% $V_{(BR)DSS}$.







J. Wavesoldering only allowed at leads.

APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO MAKE CHANGES TO PRODUCT SPECIFICATIONS WITHOUT NOTICE. IT IS THE RESPONSIBILITY OF THE CUSTOMER TO EVALUATE SUITABILITY OF THE PRODUCT FOR THEIR INTENDED APPLICATION. CUSTOMER SHALL COMPLY WITH APPLICABLE LEGAL REQUIREMENTS, INCLUDING ALL APPLICABLE EXPORT CONTROL RULES, REGULATIONS AND LIMITATIONS.

AOS' products are provided subject to AOS' terms and conditions of sale which are set forth at:

http://www.aosmd.com/terms_and_conditions_of_sale

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

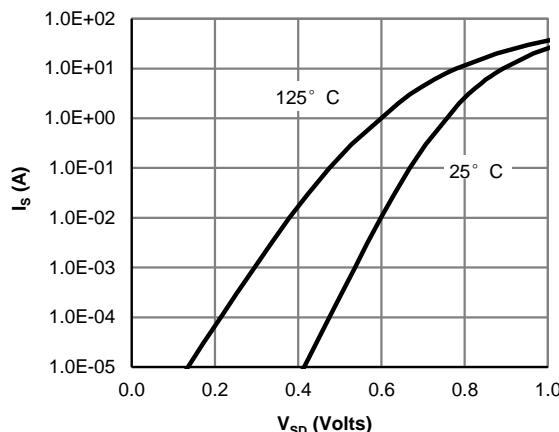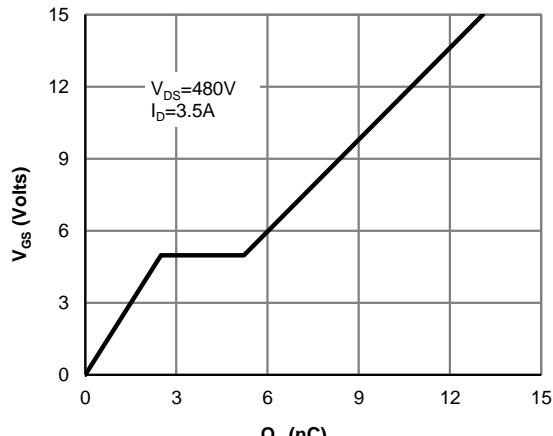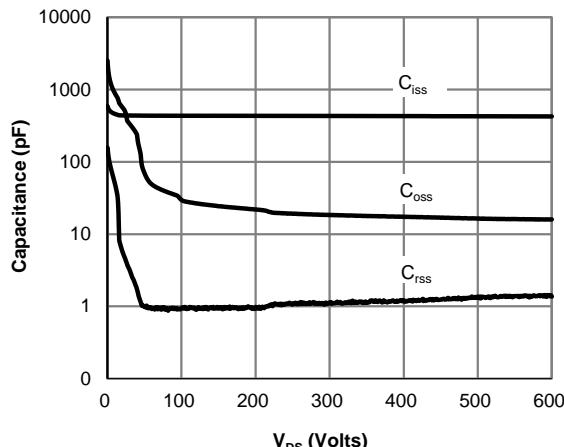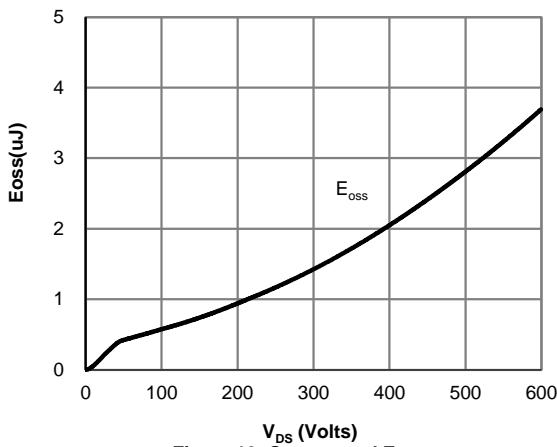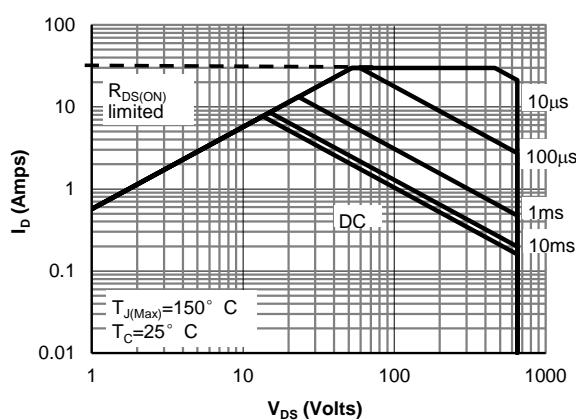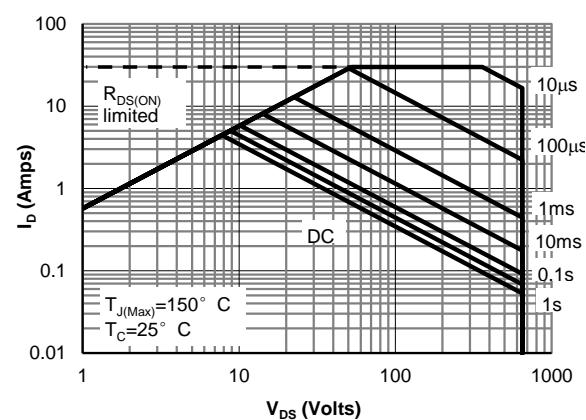Figure 1: On-Region Characteristics @25° C

Figure 2: On-Region Characteristics@125° C

Figure 3: Transfer Characteristics

Figure 4: On-Resistance vs. Drain Current and Gate Voltage

Figure 5: On-Resistance vs. Junction Temperature

Figure 6: Break Down vs. Junction Temperature

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

Figure 7: Body-Diode Characteristics (Note E)

Figure 8: Gate-Charge Characteristics

Figure 9: Capacitance Characteristics

Figure 10: Coss stored Energy

Figure 11: Maximum Forward Biased Safe Operating Area for AOT(B)7S65L (Note F)

Figure 12: Maximum Forward Biased Safe Operating Area for AOTF7S65 (Note F)

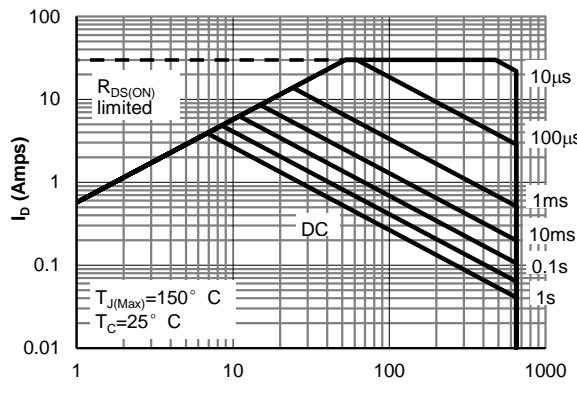
TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Figure 13: Maximum Forward Biased Safe Operating Area for AOTF7S65L (Note F)

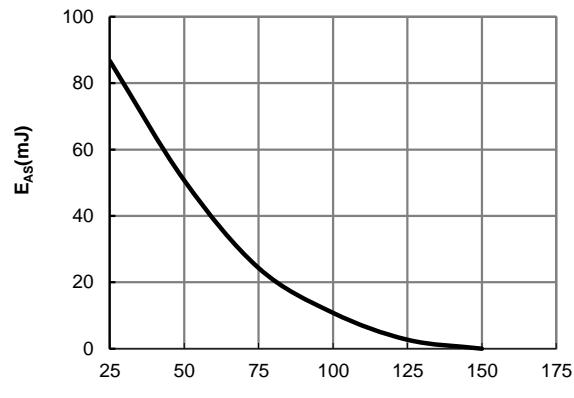


Figure 14: Avalanche energy

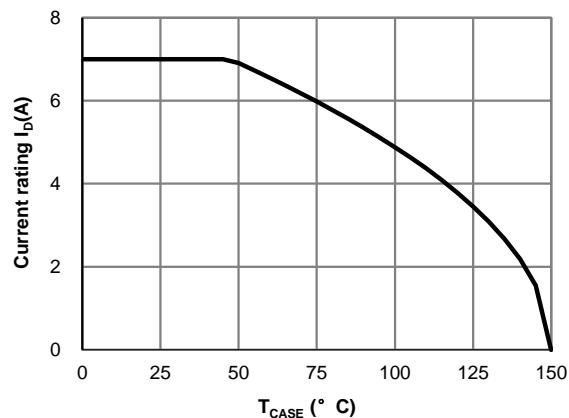


Figure 15: Current De-rating (Note B)

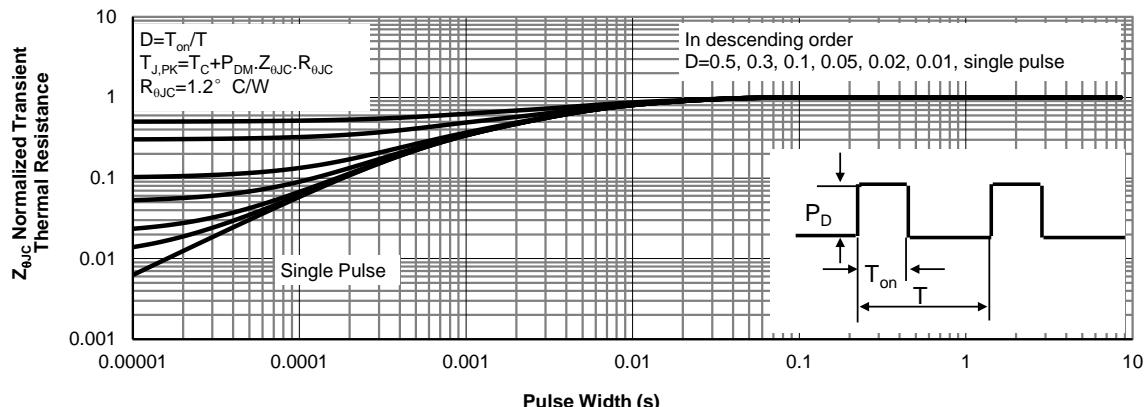
TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS


Figure 16: Normalized Maximum Transient Thermal Impedance for AOT(B)7S65L (Note F)

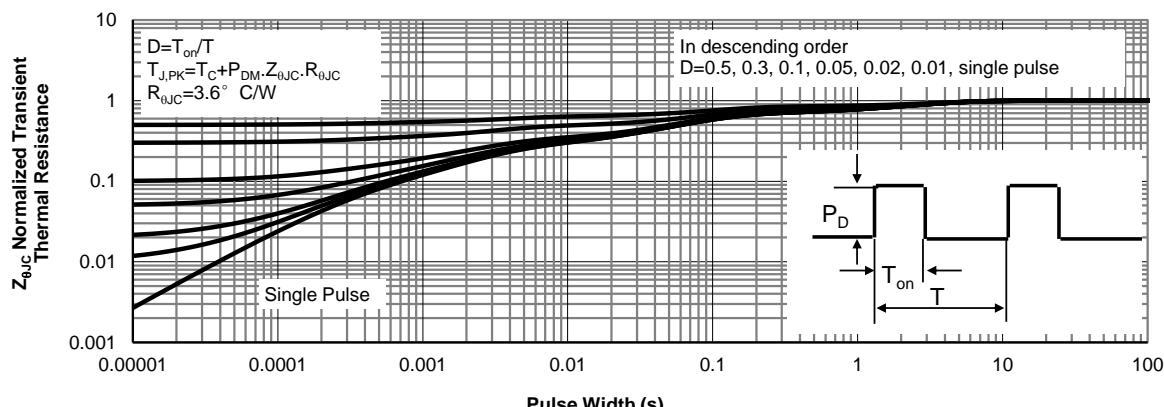


Figure 17: Normalized Maximum Transient Thermal Impedance for AOTF7S65 (Note F)

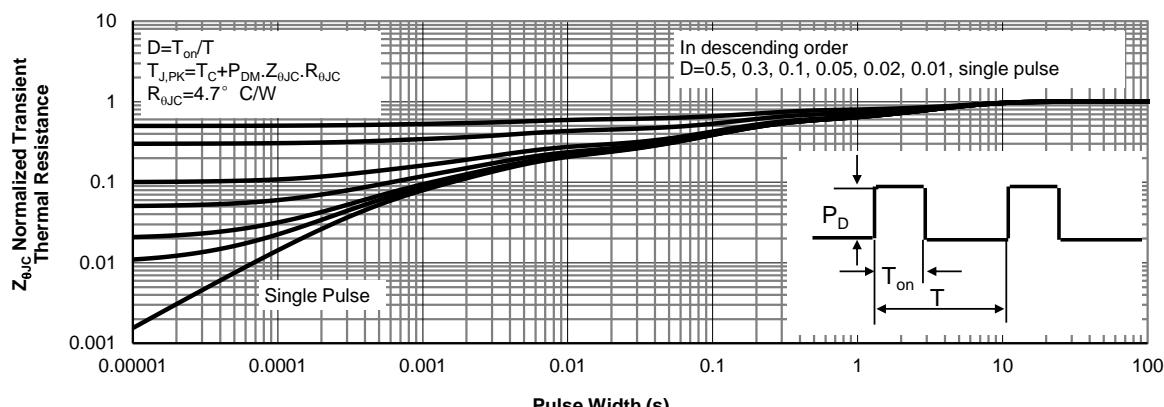
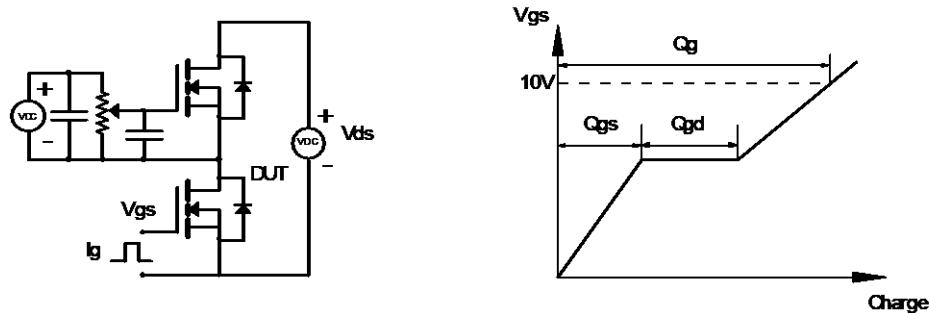
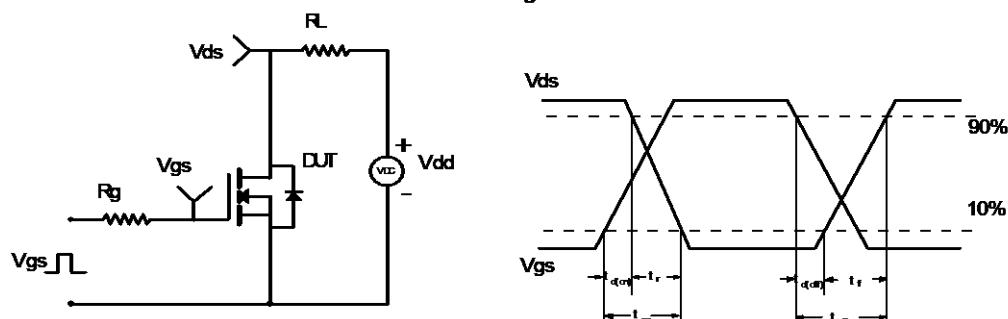
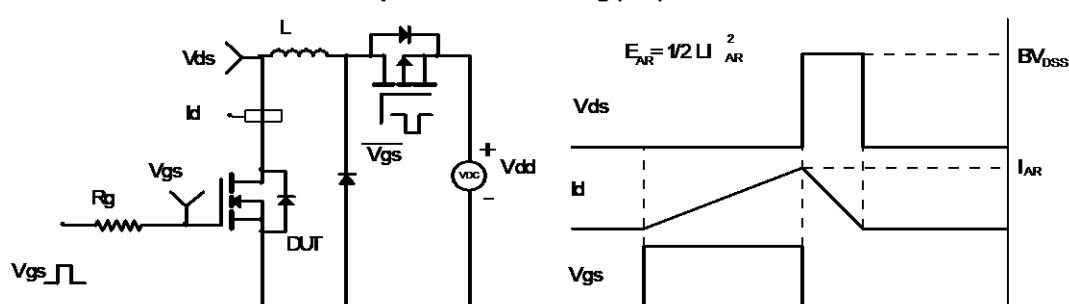


Figure 18: Normalized Maximum Transient Thermal Impedance for AOTF7S65L (Note F)

Gate Charge Test Circuit & Waveform

Resistive Switching Test Circuit & Waveforms

Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

Diode Recovery Test Circuit & Waveforms
