



# NTC thermistors for temperature measurement

## Probe assemblies

**Series/Type:** M1703  
**Ordering code:** B58703M1103A00\*  
Date: 2019-09-23  
Version: 2.0

### Applications

- Busbar temperature measurement

### Features

- Screw-on mounting with good thermal contact
- Accurate busbar temperature readings
- HV insulation acc. LV123 Class H3
- Wire acc. LV112-4 (0.13 mm<sup>2</sup> CuMg alloy with reduced weight)
- Up to 50 N pull force during installation allowed
- Twisted wire for EMC


### Options

- Alternative wire lengths, R/T characteristics and connectors available on request

### Delivery mode

- Bulk, bundled in plastic bags in cardboard box
- Cable tie and wire scrap L<sub>2</sub> must be removed before sensor installation

### Dimensional drawing

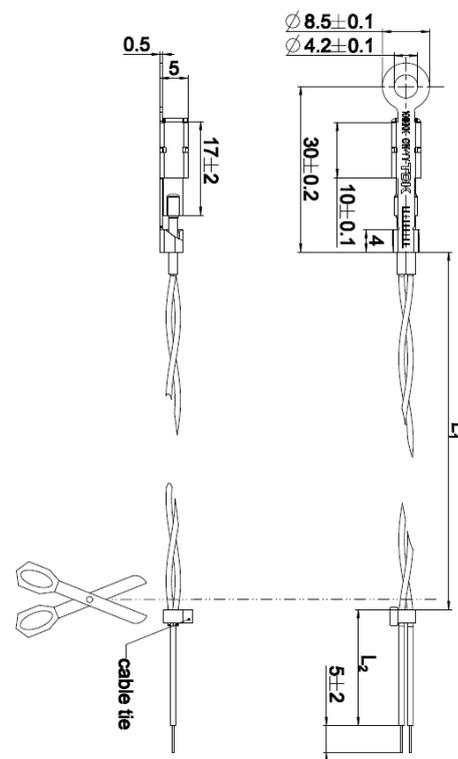

Dimensions in mm

### General technical data

Climatic category	(IEC 60068-1)		40/150/21	
Lower category temperature			-40	°C
Upper category temperature			150	°C
Maximum operating temperature	(for 6 h max.)	T <sub>op,max</sub>	200	°C
Max. power	(at 25 °C)	P <sub>25</sub>	50	mW
Rated temperature		T <sub>R</sub>	25	°C
Rated resistance		R <sub>R</sub>	10000	Ω
Resistance tolerance <sup>1)</sup>		ΔR <sub>R</sub> /R <sub>R</sub>	±1	%
B-value <sup>1)</sup>		B <sub>25/100</sub>	3625 ±1%	K
No. of R/T characteristic			7003	
Thermal time constant	(in water)	τ <sub>a</sub>	< 10	s
Insulation resistance		R <sub>ins</sub>	100	MΩ
Test voltage	(t = 60 s)	V <sub>test</sub>	2500	V DC
Sensor accuracy <sup>2)</sup>	(-30 °C ≤ T ≤ 150 °C)	ΔT	±5	K
Sensor accuracy <sup>2)</sup>	(T < -30 °C / T > 150 °C)	ΔT	±10	K

<sup>1)</sup> Values for initial glass-encapsulated NTC G1561.

<sup>2)</sup> Sensor accuracy is criteria for reliability testing.

**Wire lengths, units per box and ordering codes**

Usable wire length L <sub>1</sub> mm	Wire scrap L <sub>2</sub> <sup>3)</sup> mm	Unit per box pcs.	Detailed drawing <sup>4)</sup>	Ordering codes
max. 655	min. 45	800	Ind. 06b dated 2017-11-13	B58703M1103A001
max. 1000	min. 45	600	Ind. 04 dated 2017- 11-13	B58703M1103A002

**Reliability data**

Test	Standard	Test conditions	Criteria	Remarks
Initial RT parameter	LV124 – K02 (modified)	–40 °C, 25 °C, 85 °C; 150 °C; 200 °C	$\Delta T \pm 5 \text{ K}$	No visible damage
Insulation strength test	LV123 H3	1000 V DC for 60 s	$R_{\text{iso}} > 1 \text{ G}\Omega$	No visible damage
Voltage strength test	LV123 H3	2500 V DC for 60 s	$I_{\text{leak}} < 10 \text{ mA}$	No flashover
Response time test		25 °C water to 85 °C water	$\tau_a < 10 \text{ s}$	No visible damage
ESD test	AEC-Q200-002 ISO / DIS 10605	ESD network 2000 $\Omega$ , 330 pF Direct contact discharge up to 8 kV Air discharge 25 kV	$\Delta T \pm 5 \text{ K}$	No visible damage
Temperature storage test	LV124 K-01 sequence	–40 °C for 12 h 150 °C for 12 h 2 cycles (48 h in total)	$\Delta T \pm 5 \text{ K}$	No visible damage
Low temperature operation test	LV124 K-01 sequence	–40 °C for 48 h in operation	$\Delta T \pm 5 \text{ K}$	No visible damage
Thermal shock test	LV124 K-05 sequence	–40 °C / 150 °C for 100 cycles dwell time 30 min, transition < 30 s	$\Delta T \pm 5 \text{ K}$	No visible damage
Cyclic damp heat test	LV124 K-08 sequence	25 °C / 55 °C, 97% r. H., 6 cycles of 24 h (144 h in total) in operation	$\Delta T \pm 5 \text{ K}$	No visible damage
Mechanical shock test	LV124 M-05 sequence	Acceleration half sine: 50 g / 6 ms, 60 shocks (10 shocks in 6 directions) in operation	$\Delta T \pm 5 \text{ K}$	No visible damage

<sup>3)</sup> Not intended for use, must be removed before sensor installation and operation.

<sup>4)</sup> On request.

Test	Standard	Test conditions	Criteria	Remarks
Vibration test	LV124 M-04 sequence (profile D)	−40 °C / 125 °C, 5 Hz ... 2000 Hz, 4.2 g 8 h per axis (in total 24 h), intermittent operation	$\Delta T \pm 5 \text{ K}$	No visible damage
Damp heat test (steady state)	LV124 K-14	40 °C / 93 % r. H, in operation for 21 days	$\Delta T \pm 5 \text{ K}$	No visible damage
Corrosion test with flow of mixed gas	LV124 K-18	SO <sub>2</sub> 0.2 ppm, H <sub>2</sub> S 0.01 ppm, NO <sub>2</sub> 0.2 ppm, Cl <sub>2</sub> 0.01 ppm, Test duration 21 days	$\Delta T \pm 5 \text{ K}$	No visible damage
Chemical media test	LV124-C01	Diesel fuel, petrol/gasoline unleaded, engine oil, transmission fluid, grease, battery fluid, brake fluid, antifreeze fluid, windscreen washer fluid, vehicle washing chemicals, Test duration 24 h	$\Delta T \pm 5 \text{ K}$	No visible damage
High temperature endurance test	LV124 L-02	125 °C for 2000 h, in operation with overvoltage 900 V DC	$\Delta T \pm 5 \text{ K}$	No visible damage
Temperature cycle endurance test	LV124 L-03	−40 °C / 125 °C for 140 cycles, dwell time 30 min., in operation with overvoltage 900 V DC	$\Delta T \pm 5 \text{ K}$	No visible damage

**Note**

- NTC element qualified acc. To AEC-Q200 rev. D.
- Details of reliability tests on request.

**R/T characteristics**

R/T No.	<b>7003</b>					
T (°C)	B <sub>25/100</sub> = 3625 K					
	R <sub>nom</sub> (Ω)	R <sub>min</sub> (Ω)	R <sub>max</sub> (Ω)	ΔR/R <sub>nom</sub> (±%)	ΔT (±K)	α (%/K)
-40	243240	232440	254040	4.4	0.7	6.0
-35	180810	173370	188240	4.1	0.7	5.8
-30	135750	130590	140910	3.8	0.7	5.6
-25	102900	99302	106510	3.5	0.6	5.4
-20	78716	76188	81244	3.2	0.6	5.3
-15	60739	58957	62521	2.9	0.6	5.1
-10	47258	45998	48519	2.7	0.5	4.9
-5	37062	36169	37955	2.4	0.5	4.8
0	29287	28653	29920	2.2	0.5	4.6
5	23311	22862	23759	1.9	0.4	4.5
10	18684	18367	19000	1.7	0.4	4.4
15	15075	14853	15297	1.5	0.3	4.2
20	12240	12087	12394	1.3	0.3	4.1
25	10000	9900	10100	1.0	0.3	4.0
30	8217.6	8114.8	8320.3	1.3	0.3	3.9
35	6790.9	6692.8	6889	1.4	0.4	3.8
40	5642.2	5550.1	5734.3	1.6	0.4	3.7
45	4712.2	4626.7	4797.7	1.8	0.5	3.6
50	3955	3876.3	4033.8	2.0	0.6	3.5
55	3335.5	3263.4	3407.6	2.2	0.6	3.4
60	2826	2760.2	2891.7	2.3	0.7	3.3
65	2404.9	2345	2464.7	2.5	0.8	3.2
70	2055.3	2000.9	2109.6	2.6	0.9	3.1
75	1763.7	1714.4	1813	2.8	0.9	3.0
80	1519.5	1474.7	1564.2	2.9	1.0	2.9
85	1314.1	1273.5	1354.6	3.1	1.1	2.9
90	1140.6	1103.8	1177.4	3.2	1.2	2.8
95	993.52	960.12	1026.9	3.4	1.2	2.7
100	868.37	838.04	898.71	3.5	1.3	2.7
105	761.49	733.91	789.08	3.6	1.4	2.6
110	669.89	644.79	694.99	3.7	1.5	2.5

R/T No.	<b>7003</b>					
T (°C)	B <sub>25/100</sub> = 3625 K					
	R <sub>nom</sub> (Ω)	R <sub>min</sub> (Ω)	R <sub>max</sub> (Ω)	ΔR/R <sub>nom</sub> (±%)	ΔT (±K)	α (%/K)
115	591.12	568.25	613.99	3.9	1.6	2.5
120	523.16	502.29	544.02	4.0	1.7	2.4
125	464.33	445.28	483.39	4.1	1.7	2.4
130	413.27	395.84	430.69	4.2	1.8	2.3
135	368.8	352.85	384.76	4.3	1.9	2.3
140	329.98	315.34	344.61	4.4	2.0	2.2
145	295.98	282.54	309.41	4.5	2.1	2.2
150	266.12	253.77	278.48	4.6	2.2	2.1
155	239.84	228.47	251.22	4.7	2.3	2.1
160	216.65	206.17	227.13	4.8	2.4	2.0
165	196.13	186.45	205.81	4.9	2.5	2.0
170	177.93	168.99	186.88	5.0	2.6	1.9
175	161.76	153.48	170.04	5.1	2.7	1.9
180	147.35	139.67	155.02	5.2	2.8	1.8
185	134.48	127.36	141.61	5.3	2.9	1.8
190	122.97	116.36	129.59	5.4	3.0	1.8
195	112.65	106.5	118.81	5.5	3.1	1.7
200	103.38	97.649	109.12	5.5	3.3	1.7

## Cautions and warnings

Do not apply continuous pull-force between sensor and wire ends. Pull force requirement of 50 N is for short-term mounting conditions only. Consider metal compliance when mounting the sensor. Brass is not suitable for mounting sensor to an aluminum surface as contact corrosion may occur.

## Storage

- Store thermistors only in original packaging. Do not open the package prior to storage.
- Storage conditions in original packaging: storage temperature  $-10\text{ }^{\circ}\text{C}$  ...  $+45\text{ }^{\circ}\text{C}$ , relative humidity 45% up to 75% annual mean, <95% maximum 30 days per annum, dew precipitation is inadmissible.
- Do not store thermistors where they are exposed to heat or direct sunlight. Otherwise, the packing material may be deformed or components may stick together, causing problems during mounting.
- Avoid contamination of thermistor surface during storage, handling and processing.
- Avoid storage of thermistors in harmful environments like corrosive gases (SO<sub>x</sub>, Cl etc).
- Use the components as soon as possible after opening the factory seals, i.e. the polyvinyl-sealed packages.
- Crimping the wire ends is permissible until 36 months after delivery because the formed oxide layer is destroyed during the crimping process. Insulation decelerates the oxidation of copper, so the wires ends must be stripped directly prior crimping.
- Soldering or welding the wire ends is only permissible within 6months after delivery.

## Handling

- NTC thermistors must not be dropped. Chip-offs or any other damage must not be caused during handling of NTCs.
- Avoid contamination of thermistor surface during handling. Gloves are recommended.
- Washing processes may damage the product due to the possible static or cyclic mechanical loads (e.g. ultrasonic cleaning). They may cause cracks to develop on the product and its parts, which might lead to reduced reliability or lifetime.

## Bending/ twisting leads

- A lead (wire) may be bent at a minimum distance of twice the wire's diameter plus 4 mm from the component head or housing. When bending ensure the wire is mechanically relieved at the component head or housing. The bending radius should be at least 0.75 mm.

## Soldering

- Use resin-type flux or non-activated flux.
- Insufficient preheating may cause ceramic cracks.
- Rapid cooling by dipping in solvent is not recommended.
- Complete removal of flux is recommended.

## Mounting

- Ensure that no thermo-mechanical stress occurs due to production processes (curing or overmolding processes) when thermistors are sealed, potted or overmolded or during their subsequent operation. The maximum temperature of the thermistor must not be exceeded. Ensure that the materials used (sealing/potting compound and plastic material) are chemically neutral.
- Electrodes/contacts must not be scratched or damaged before/during/after the mounting process.
- Contacts and housing used for assembly with the thermistor must be clean before mounting.
- Ensure that adjacent materials are designed for operation at temperatures comparable to the surface temperature of the thermistor. Be sure that surrounding parts and materials can withstand the temperature.
- Avoid contamination of the thermistor surface during processing.
- The connections of sensors (e.g. cable end, wire end, plug terminal) may only be exposed to an environment with normal atmospheric conditions.
- Tensile forces on cables or leads must be avoided during mounting and operation.
- Bending or twisting of cables or leads directly on the thermistor body is not permissible.
- Avoid using chemical substances as mounting aids. It must be ensured that no water or other liquids enter the NTC thermistors (e.g. through plug terminals). In particular, water based substances (e.g. soap suds) must not be used as mounting aids for sensors.

## Operation

- Use thermistors only within the specified operating temperature range.
- Use thermistors only within the specified power range.
- Environmental conditions must not harm the thermistors. Only use the thermistors under normal atmospheric conditions or within the specified conditions.
- Ensure that no significant thermo-mechanical stress occurs during operation due to the mounting situation. Fixtures must not overstress the sensor by an excessive mechanical preload.
- Contact of NTC thermistors with any liquids and solvents shall be prevented. It must be ensured that no water enters the NTC thermistors (e.g. through plug terminals). For measurement purposes (checking the specified resistance vs. temperature), the component must not be immersed in water but in suitable liquids (e.g. Galden).
- Avoid dewing and condensation unless thermistor is specified for these conditions.
- Bending or twisting of cables and/or wires is not permissible during operation of the sensor in the application.
- Be sure to provide an appropriate fail-safe function to prevent secondary product damage caused by malfunction.

This listing does not claim to be complete, but merely reflects the experience of TDK Electronics AG.

## Display of ordering codes for TDK Electronics products

The ordering code for one and the same product can be represented differently in data sheets, data books, other publications, on the company website, or in order-related documents such as shipping notes, order confirmations and product labels. **The varying representations of the ordering codes are due to different processes employed and do not affect the specifications of the respective products.** Detailed information can be found on the Internet under [www.tdk-electronics.tdk.com/orderingcodes](http://www.tdk-electronics.tdk.com/orderingcodes).

## Important notes

The following applies to all products named in this publication:

1. Some parts of this publication contain **statements about the suitability of our products for certain areas of application**. These statements are based on our knowledge of typical requirements that are often placed on our products in the areas of application concerned. We nevertheless expressly point out **that such statements cannot be regarded as binding statements about the suitability of our products for a particular customer application**. As a rule we are either unfamiliar with individual customer applications or less familiar with them than the customers themselves. For these reasons, it is always ultimately incumbent on the customer to check and decide whether a product with the properties described in the product specification is suitable for use in a particular customer application.
2. We also point out that **in individual cases, a malfunction of electronic components or failure before the end of their usual service life cannot be completely ruled out in the current state of the art, even if they are operated as specified**. In customer applications requiring a very high level of operational safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health (e.g. in accident prevention or life-saving systems), it must therefore be ensured by means of suitable design of the customer application or other action taken by the customer (e.g. installation of protective circuitry or redundancy) that no injury or damage is sustained by third parties in the event of malfunction or failure of an electronic component.
3. **The warnings, cautions and product-specific notes must be observed.**
4. In order to satisfy certain technical requirements, **some of the products described in this publication may contain substances subject to restrictions in certain jurisdictions (e.g. because they are classed as hazardous)**. Useful information on this will be found in our Material Data Sheets on the Internet ([www.tdk-electronics.tdk.com/material](http://www.tdk-electronics.tdk.com/material)). Should you have any more detailed questions, please contact our sales offices.
5. We constantly strive to improve our products. Consequently, **the products described in this publication may change from time to time**. The same is true of the corresponding product specifications. Please check therefore to what extent product descriptions and specifications contained in this publication are still applicable before or when you place an order.

We also **reserve the right to discontinue production and delivery of products**. Consequently, we cannot guarantee that all products named in this publication will always be available. The aforementioned does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

6. Unless otherwise agreed in individual contracts, **all orders are subject to our General Terms and Conditions of Supply**.
7. **Our manufacturing sites serving the automotive business apply the IATF 16949 standard**. The IATF certifications confirm our compliance with requirements regarding the quality management system in the automotive industry. Referring to customer requirements and customer specific requirements ("CSR") TDK always has and will continue to have the policy of respecting individual agreements. Even if IATF 16949 may appear to support the acceptance of unilateral requirements, we hereby like to emphasize that **only requirements mutually agreed upon can and will be implemented in our Quality Management System**. For clarification purposes we like to point out that obligations from IATF 16949 shall only become legally binding if individually agreed upon.

## Important notes

8. The trade names EPCOS, CeraCharge, CeraDiode, CeraLink, CeraPad, CeraPlas, CSMP, CTVS, DeltaCap, DigiSiMic, ExoCore, FilterCap, FormFit, LeaXield, MiniBlue, MiniCell, MKD, MKK, MotorCap, PCC, PhaseCap, PhaseCube, PhaseMod, PhiCap, PowerHap, PQSine, PQvar, SIFERRIT, SIFI, SIKOREL, SilverCap, SIMDAD, SiMic, SIMID, SineFormer, SIOV, ThermoFuse, WindCap are **trademarks registered or pending** in Europe and in other countries. Further information will be found on the Internet at [www.tdk-electronics.tdk.com/trademarks](http://www.tdk-electronics.tdk.com/trademarks).

Release 2018-10