
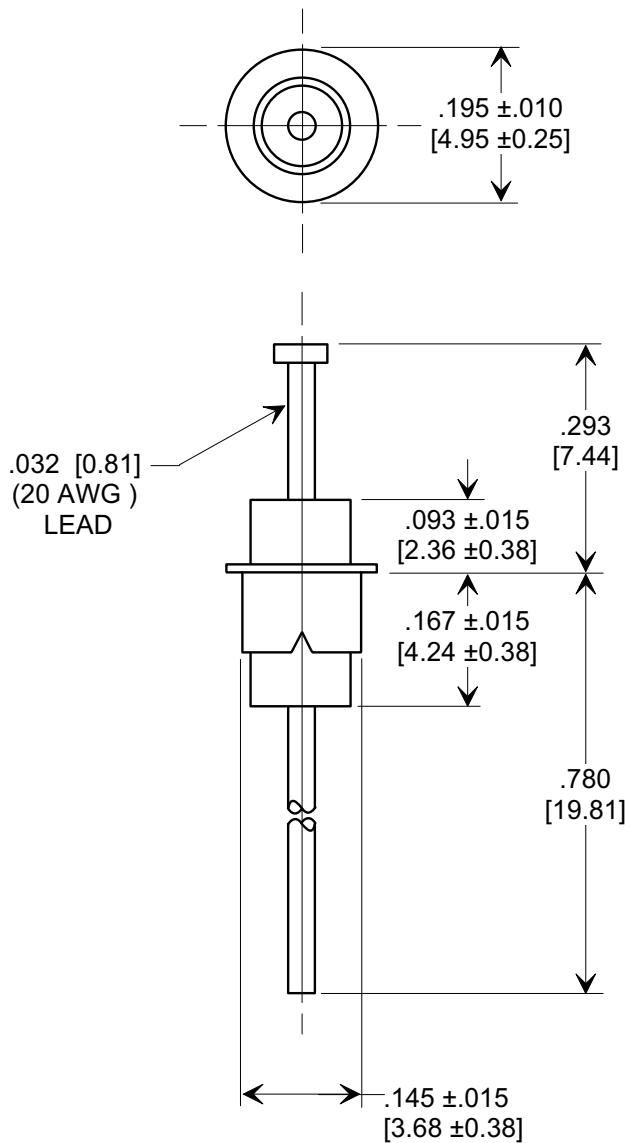



Electrical Testing  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

**MARKETING SALES DRAWING**  
**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

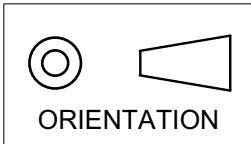

NOTES:

1. TUSONIX STANDARD PART NUMBER: 4101-002.  
TUSONIX RoHS COMPLIANT PART NUMBER: 4101-002 LF.  
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
2. RoHS COMPLIANT PART MARKED WITH GREEN DOT FOR IDENTIFICATION.

MIN. CAP. (pF)	WORKING VOLTAGE (WVdc)		CURRENT Idc.	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220			
	85°C	125°C				10MHz	100MHz	1GHz	10GHz
1750	250	125	10A	10 G Ω	500	5	50	60	60

REVISION RECORD										Title	
Original Release C.O.	0									<b>EYELET STYLE</b>	
DRAWING REVISED LE 12-9-83	1									<b>EMI FILTER</b>	
<b>WAS SK664-070-S LE 1-13-84</b>	<b>2</b>										
DIMS. AND TOL. REVSD, DWG. RELEASED LE 1-8-85											
<b>C.O. 1653</b>	<b>3</b>										
CURRENT UNIT "A" ADDED LE. 8-20-85											
<b>C.O. 2595</b>	<b>4</b>										
ADDED RED EPOXY COATING. S.M. 07-15-98											
<b>19980715-6-01</b>	<b>6</b>										
ADDED METRIC NOTES, CIRCUIT I.R. & DWV. S.M. 03-01-05											
<b>970224-6</b>	<b>5</b>										
NOTE 1 REV'D (2) SPACES ADDED BETWEEN 4-101-0002 AND LF LE. 03-14-05											
<b>20050223-5-04</b>	<b>7</b>										
<b>20050314-1-01</b>	<b>8</b>										
<b>TUSONIX</b> TUCSON, ARIZONA											
										<b>A</b>	
										<b>4101-002</b>	