

HTB18L-P4A5BB

SureSense

HYBRID PHOTOELECTRIC SENSORS





Ordering information

Туре	Part no.
HTB18L-P4A5BB	1073611

Other models and accessories → www.sick.com/SureSense

Illustration may differ



Detailed technical data

Features

Sensor/ detection principle	Photoelectric proximity sensor, Background suppression
Dimensions (W x H x D)	16.2 mm x 48.5 mm x 31.8 mm
Housing design (light emission)	Hybrid
Thread diameter (housing)	M18
Mounting system type	M18, nose / side (24 24.5 mm)
Housing color	Blue
Sensing range max.	30 mm 300 mm ¹⁾
Sensing range	30 mm 250 mm ²⁾
Type of light	Visible red light
Light source	Laser ^{3) 4)}
Light spot size (distance)	2 mm (120 mm)
Wave length	655 nm
Laser class	I .
Adjustment	
Potentiometer, right	Sensing range
Potentiometer, left	None
Special applications	Detecting small objects
Special features	Signal strength light bar

 $^{^{1)}}$ Object with 90 % reflectance (referred to standard white, DIN 5033).

 $^{^{2)}}$ Object with 6 % reflectance (referred to standard black, DIN 5033).

 $^{^{3)}}$ Average service life: 50,000 h at TU = +25 °C.

 $^{^{4)}}$ CLASS 1 LASER PRODUCT EN60825-1:2014, IEC60825-1:2014, Maximum pulse power < 2,5 mW, Pulse length: 4 μ s, Wavelength: 650 ... 670 nm, Complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

Mechanics/electronics

Supply voltage	10 V DC 30 V DC
Ripple	< 5 V _{pp} ¹⁾
Power consumption	20 mA ²⁾
Switching output	PNP
Output function	Complementary
Switching mode	Light/dark switching
Switching output detail	
Switching output Q1	PNP, Light switching
Switching output Q2	PNP, Dark switching
Output current I _{max.}	≤ 100 mA
Response time	\leq 0.5 ms $^{3)}$
Switching frequency	1,000 Hz ⁴⁾
Connection type	Male connector M12, 4-pin
Circuit protection	A ⁵⁾ B ⁶⁾ D ⁷⁾
Protection class	III ⁸⁾
Weight	18 g
Housing material	Plastic, VISTAL®
Optics material	Plastic, PMMA
Enclosure rating	IP67 IP69K
EMC	EN 60947-5-2 (The sensor complies with the Radio Safety Requirements (EMC) for the industrial sector (Radio Safety Class A). It may cause radio interference if used in a residential area.)
Ambient operating temperature	-30 °C +55 °C ⁹⁾
Ambient storage temperature	-40 °C +70 °C
UL File No.	E189383

 $^{^{1)}}$ May not exceed or fall below U_{V} tolerances.

Safety-related parameters

MTTF _D	282.7 years
DC _{avg}	0%

Classifications

ECI@ss 5.0	27270904
ECI@ss 5.1.4	27270904

 $^{^{2)}}$ Without signal strength light bar and load.

 $^{^{}m 3)}$ Signal transit time with resistive load.

⁴⁾ With light/dark ratio 1:1.

 $^{^{5)}}$ A = V_S connections reverse-polarity protected.

 $^{^{6)}}$ B = inputs and output reverse-polarity protected.


 $^{^{7)}}$ D = outputs overcurrent and short-circuit protected.


⁸⁾ Reference voltage: 50 V DC.

 $^{^{9)}}$ Below Ta = -10 °C, sensor must be turned on at Ta > -10 °C. Sensor cannot be turned on below Ta= -10 °C.

ECI@ss 6.0	27270904
ECI@ss 6.2	27270904
ECI@ss 7.0	27270904
ECI@ss 8.0	27270904
ECI@ss 8.1	27270904
ECI@ss 9.0	27270904
ETIM 5.0	EC002719
ETIM 6.0	EC002719
UNSPSC 16.0901	39121528

Dimensional drawing (Dimensions in mm (inch))

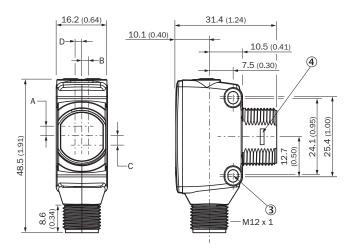




- ① LED indicator yellow: Status of received light beam
- ② LED indicator green: power on
- 3 M3 mounting hole
- 4 Snap Connection for flush ring (sold seperatly)
- ⑤ Potentiometer (if selected) or LED Indicators

Dimensions in mm (inch)	Receiver		Sender	
	A	В	C	D
HTB18 / HTF18	- 1.1 (0.04)	1.1 (0.04)	4.7 (0.19)	0.6 (0.02)
HTE18 / HL18 / HSE18	2.5 (0.1)	0.0 (0.0)	4.0 (0.16)	0.0 (0.0)
HTB18L / HTF18L / HL18L / HSE18L	2.5 (0.1)	0.0 (0.0)	3.5 (0.14)	0.0 (0.0)

Adjustments possible




- ① LED indicator yellow: Status of received light beam
- $\ensuremath{\textcircled{2}}$ LED indicator green: power on
- 3 Signal strength light bar

Connection diagram

Cd-243


Characteristic curve

% of sensing range




- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 20 % remission
- 3 Sensing range on white, 90% remission

Light spot size




Sensing range diagram



- ① Sensing range on black, 6% remission
- ② Sensing range on gray, 20 % remission
- 3 Sensing range on white, 90% remission

Functions

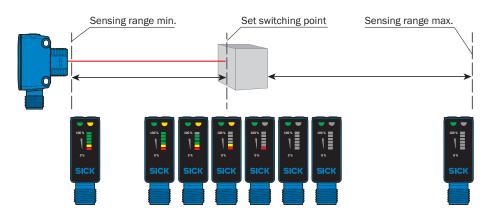

Recommended accessories

Other models and accessories → www.sick.com/SureSense

	Brief description	Туре	Part no.		
Mounting bra	Mounting brackets and plates				
	Mounting plate for M18 sensors, steel, zinc coated, without mounting hardware	BEF-WG-M18	5321870		
40	Mounting bracket for M18 sensors, steel, zinc coated, without mounting hardware	BEF-WN-M18	5308446		
	Bottom M18 mounting bracket SureSense sensors	MB-M18-H18	2085820		
Other mount	Other mounting accessories				
	Spherical bearing M18	Ball holder	4057409		
	Mounting bracket	MB-BS18MM-M4	2049694		
Terminal and	Terminal and alignment brackets				
	Clamping block for round sensors M18, without fixed stop, plastic (PA12), glass-fiber reinforced, mounting hardware included	BEF-KH-M18	2051481		
Plug connect	Plug connectors and cables				
	Head A: female connector, M12, 4-pin, straight, A-coded Head B: Flying leads Cable: Sensor/actuator cable, PVC, unshielded, 5 m	YF2A14- 050VB3XLEAX	2096235		
	Head A: male connector, M12, 4-pin, straight Head B: - Cable: unshielded	STE-1204-G	6009932		

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is "Sensor Intelligence."

WORLDWIDE PRESENCE:

Contacts and other locations -www.sick.com

